



DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

(2)

ation is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE January 1993		3. REPORT TYPE AND DATES COVERED Technical	
4. TITLE AND SUBTITLE Fiber-optic Raman and Micro-Raman Measurement of Bonding Agents at Interfaces During the Curing Process.				5. FUNDING NUMBERS DAAL03-92-G-0316	
6. AUTHOR(S) M. L. Myrick and S. L. Morgan					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Department of Chemistry & Biochemistry University of South Carolina Columbia, SC 29208				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U. S. Army Research Office P. O. Box 12211 Research Triangle Park, NC 27709-2211				10. SPONSORING/MONITORING AGENCY REPORT NUMBER ARO 30450.1-ms-yip	
11. SUPPLEMENTARY NOTES The view, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other documentation.					
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) We have proposed to investigate Raman scattering of epoxies and polyimides in interfacial regions using fiber optic evanescent spectroscopy. These data will be analyzed with chemometric multivariate statistics to provide an understanding of the curing and bonding process in real composites within 0.1 μ m resolution and observe inhomogeneities in the curing process at high optical resolution. During this funding period, we have obtained IR and Raman spectra of test matrix materials, made assignments of molecular vibrations, performed laboratory measurements of the curing of the bulk matrices at different temperatures, and begun a principal component analysis of the curing process. Construction of a micro-Raman system was also begun.					
14. SUBJECT TERMS Raman, Cure, Reaction, Fiber-optic, Micro-Raman, Composite.				15. NUMBER OF PAGES 10	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL		

Table of Contents

List of Appendixes, Illustrations and Tables.....	1
Report.....	2
A. Statement of the Problem Studied.....	2
B. Most Important Results.....	2
Raman of Raw matrix components	3
Assignment of Vibrations.....	4
Laboratory Measurements of Curing.....	7
Principal Component Analysis (statistical).....	7
Construction of a Micro-Raman System.....	7
C. List of Publications and Technical Reports.....	7
D. Participating Scientific Personnel, Advanced Degrees earned	8
Bibliography	8

Accession For	
NTIS	<input checked="" type="checkbox"/>
CRA&I	<input type="checkbox"/>
DTIC	<input type="checkbox"/>
TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

DTIC QUALITY INSPECTED 3

93-03346



10p8

List of Appendixes, Illustrations and Tables

Figure 1 - Structures of DGEBA and T-403	page 3
Figure 2 - FT-Raman spectra of DGEBA	page 4
Figure 3 - Structures of Model Compounds	page 4
Table I - Vibrational Assignments for DGEBA	page 5

Report

**Fiber-Optic Raman and Micro-Raman Measurements
of Bonding Agents at Interfaces
During the Curing Process**

**M.L. Myrick, Principal Investigator
S.L. Morgan, Co-Investigator**

**University of South Carolina
Columbia, SC 29208**

A. Statement of the Problem Studied

The strength of a joint or processed composite depends to a great extent on the physical properties of interfaces and the bulk matrix. These physical properties depend on chemical composition and bonding, characteristics that are readily observable with vibrational spectroscopy. Raman scattering is uniquely applicable to this type of analysis.

We have proposed to investigate Raman scattering of epoxies and polyimides in interfacial regions using fiber optic evanescent spectroscopy. These data will be analyzed with chemometric multivariate statistics to provide an understanding of the curing and bonding process in real composites within 0.1 μm of interfaces. This will be complemented by micro-Raman measurements that will determine the spatial extent of the interface with 1 μm resolution and observe inhomogeneities in the curing process at high optical resolution. This project combines the efforts of two research groups: those of Professor Myrick (experimental measurements) and of Professor Morgan (statistical analysis).

B. Most Important Results

During the First Year of this three-year project, the proposed plan of work called for the following:

Year 1:


- IR & Raman spectra acquired for raw matrix components
- assignment of vibrations of materials
- Laboratory measurements of curing of bulk matrices at different temperatures
- principal component analysis (statistical)
- Evanescent Raman spectra of raw matrix components
- construction of micro-Raman system

This project was divided into four funding periods, the first being 15 July 1992 to 30 September 1992. This corresponds to the first 2.5 months of the first year of the project. During this period, several of the objectives of the first year have been met.


Raman of Raw matrix components

A test polymer system was chosen for this project. This is the DER332/Jeffamine T-403 epoxy cure system, a two-component cure system.

For the epoxy, structures of the two components are shown below in Figure 1.

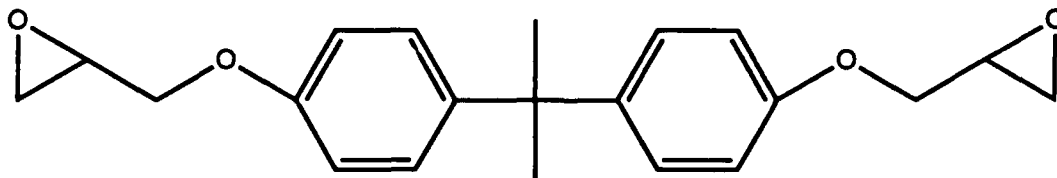

Diglycidyl ether of bisphenol-A (DGEBA)

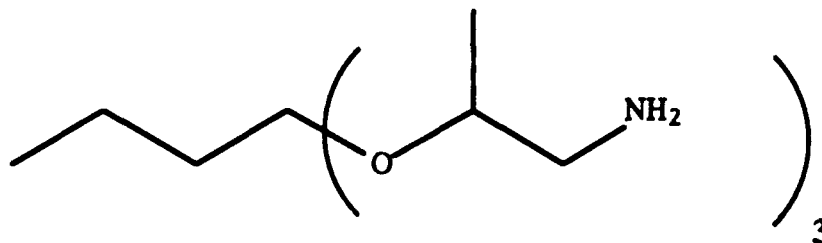

**Polyoxypropylene
(Jeffamine T-403)**

Figure 1: Chemical Structures of DER 332 and Jeffamine T-403

Figure 2 shows Raman spectra acquired for the epoxy resin (DGEBA), which dominates the spectra of the epoxy.


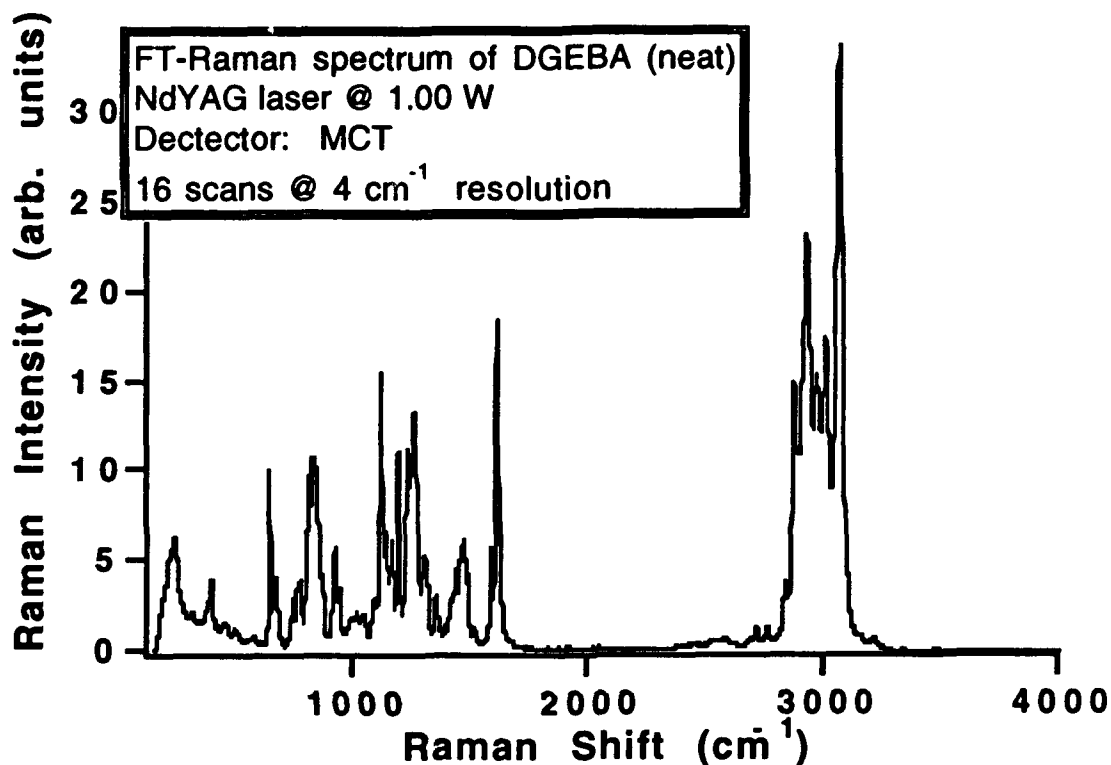


Figure 2: Raman spectrum of DER332 showing signature and C-H stretching region.


Assignment of Vibrations

Vibrational assignments for the epoxy resin of Figure 1 were obtained by studies of model compounds, ab initio calculations, and comparison with other literature. Table I gives rough assignments for the epoxy components.


Model compounds studied are shown below in Figure 3.

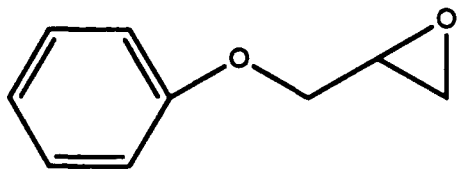


(±)-1,2-Epoxy-3-phenoxypropane



(±)-(2,3-epoxypropyl)benzene

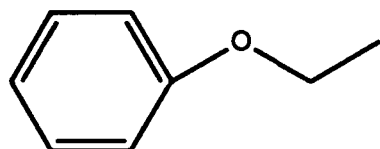

Phenetole



Butyl glycidyl ether

**Figure 3: Model Compounds Used to Generate
Vibrational Assignments for DER332**

Table 1. Infrared and Raman band assignments for DGEBA. s = strong, m = medium, w = weak, vw = very weak, sh = shoulder, str = stretch, and def = deformation.

IR	Raman	Assignments
1298m	1272w	C-O str. (ether groups) ^d
1248s	----	C-O str. (ether groups) and C-C str. ^{a,d}
----	1232s	C-O str. and phenolic C ₄ -O ₂ str. ^a
----	1211s	Epoxy group?
1184s	1186s	CH ₃ /gem-dimethyl def. and C ₆ -C _{7/8} str. ^{a,d}
1157vw	1140vw	----
----	1113s	Aromatic C-H str. and in-plane def. ^{a-d}
1065vw	----	Phenolic C ₄ -O ₂ str. ^e
1036s	----	Substituted aromatic ^{c,d,e}
1010sh	----	Substituted aromatic ^{c,d,e}
970w	----	----
916m	924sh	Epoxy group ^{a,d,e}
862sh	908m	Epoxy group ^{a,d,e}
806s	819s	Substituted aromatic ^{c,d,e}
772m	762m	C ₃ -C ₂ skeletal ^a
----	736sh	C ₃ -C ₂ skeletal ^a
----	667m	Aromatic C-H out-of- plane def. ^{b-e}
----	641s	Aromatic C-H out-of- plane def. ^{b-e}

^aThis paper. ^bReference 1. ^cReference 2. ^dReference 3. ^eReference 4.

Laboratory Measurements of Curing

The curing of the epoxy system has been studied using FT-Raman spectroscopy. Figure 4 shows spectra of the epoxy cure system before and after curing.

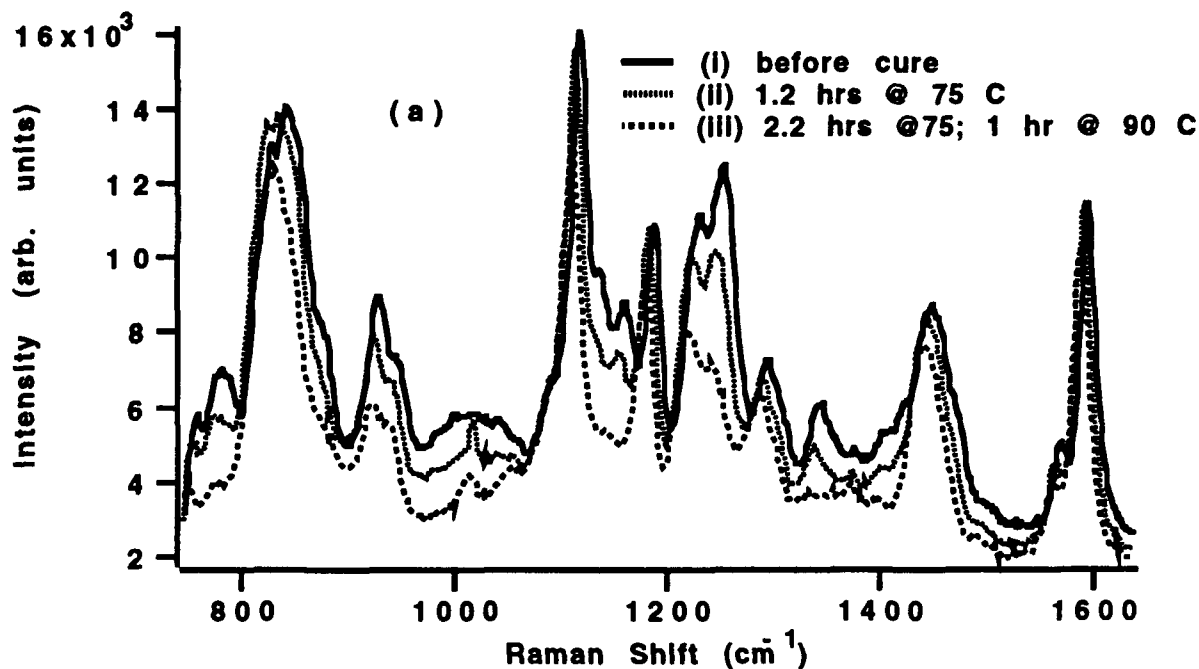


Figure 4: Raman spectra before during and after curing of DER332/Jeffamine T-403.

Principal Component Analysis (statistical)

A basis set for statistical analysis has been generated, but results are not yet available.

Construction of a Micro-Raman System

Materials for the construction of this system have been acquired and designs drawn. Construction is expected to begin in Spring, 1993.

C. List of Publications and Technical Reports

At present, no publications have resulted from this work. Two articles are currently nearing completion with submission expected in January, 1993. Two presentations have been accepted at the Pittsburg Conference in Analytical Chemistry, scheduled for March, 1993.

D. Participating Scientific Personnel, Advanced Degrees earned
The personnel involved in this research are:

Dr. M.L. Myrick, PI
Dr. S.L. Morgan, Co-PI
Dr. John Cooper, post-doctoral associate
Katherine Chike, research assistant
Jeffrey Aust, research assistant
Melinda Hale, research assistant

Because of the brevity of this work, no degrees have yet resulted.

Bibliography

- 1) Maddams, W.F. and I.A.M. Royaud, "The Characterization of Polycyclic Aromatic Hydrocarbons by Raman spectroscopy," Spectrochim.Acta, **46A**, 309(1990).
- 2) Gerrad, D.L. and W.F. Maddams, "Polymer Characterization by Raman Spectroscopy," Appl.Spectrosc.Rev., **22(2&3)**, 251(1986).
- 3) Mertz, E. and J.L. Koenig, "Application of FTIR and NMR to Epoxy Resins," Adv.Polym.Sci. **75**, 74(1986).
- 4) Lee, H. and L. Vincent "The Use of Infrared Quality Control in the Manufacture of Epoxy Resin Adhesives," Adhesives Age, Sept. 1961.